


## Quartz Crystal


SMD-version

part no.	12.86546
model	KX – 6
frequency	24.0 MHz
mode	fundamental
operating temperature	-20° ~ +70°C
storage temperature	-55°C ~ +125°C
frequency tolerance at +25°C	±30 ppm
temperature tolerance -20° ~ +70°C	±30 ppm
load capacitance $C_L$	10 pF
series resistance $R_1$ max.	60 Ohm
aging at 25°C ( first year ) max.	±2 ppm
shunt capacitance $C_0$ max.	3.5 pF
drive level max.	100 $\mu$ W
contents of reel	1000 pcs.


### Dimensions (mm):

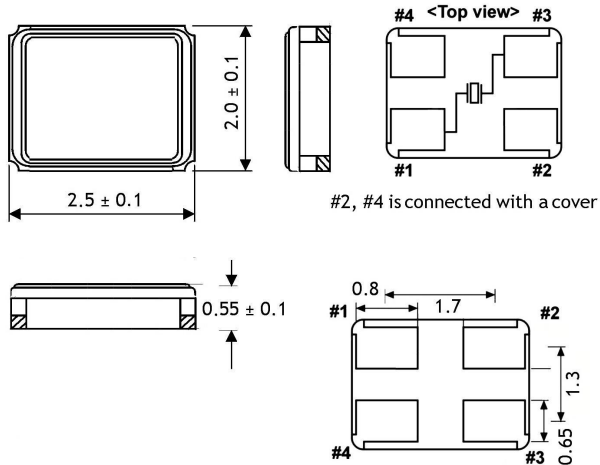

### Suggested soldering pad:



### Reflow soldering condition:

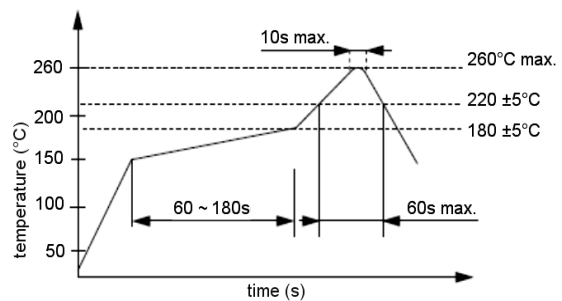

### Tape specification:

