


## Quartz Crystal


SMD-version

part no.	12.86633
model	KX – 6T
frequency	20.0 MHz
mode	fundamental
operating temperature	-40° ~ +85°C
frequency tolerance at +25°C	±20 ppm
temperature tolerance -40° ~ +85°C	±30 ppm
load capacitance $C_L$	12 pF
series resistance $R_1$ max.	80 Ohm
aging at +25°C (first year) max.	±2 ppm
shunt capacitance $C_0$ max.	3.5 pF
drive level	50 $\mu$ W typ., 100 $\mu$ W max.
contents of reel	1000 pcs.


### Dimensions (mm):

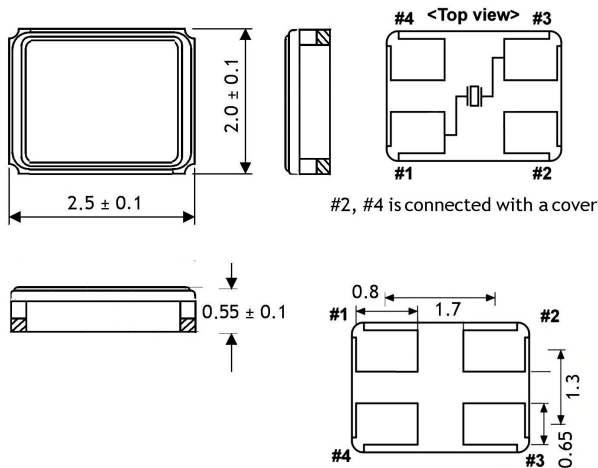


### Reflow soldering condition:

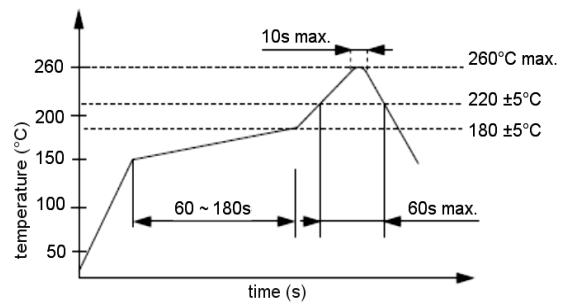

### Suggested soldering pad:



### Tape specification:

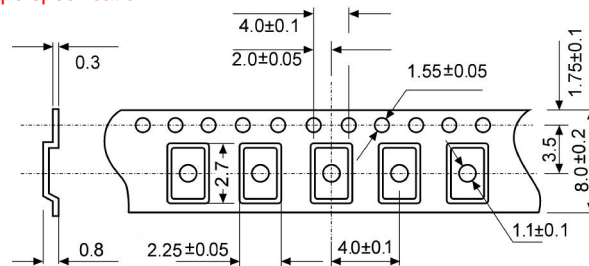

reel diameter 178 mm