




Tuning Fork Crystal


SMD-version

part no.	12.87148
model	KX-327NHT
frequency	32.768 kHz
operating temperature	-40° ~ +85°C
frequency tolerance at +25°C	± 20 ppm
temperature tolerance (parabolic coefficient)	-0.035 ppm/°C ² typ.
turnover temperature	+25°C ± 5°C
storage temperature range	-55°C ~ +125°C
load capacitance C _L	7 pF
motional capacitance (C1)	0.0036 pF, typ.
series resonance R1 max.	50k Ohm
aging at +25°C (first year) max.	± 3 ppm
shunt capacitance C _O	1.3 pF (1,0 pF typ.)
drive level	1.0 μW max., 0.1 typ.
quality factor (Q) min.	20000
reflow soldering condition max.	10 seconds at +260°C (2 times)
contents of reel	3000 pcs.
part no.	12.87148


Dimensions (mm):

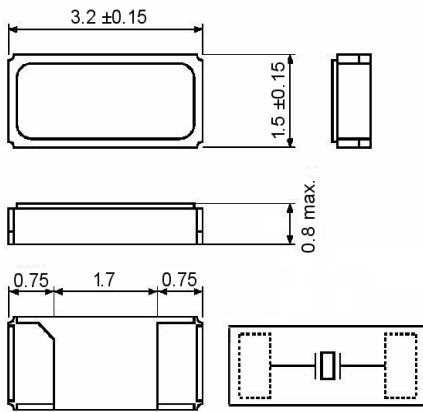

Suggested soldering pad:



Reflow soldering condition:

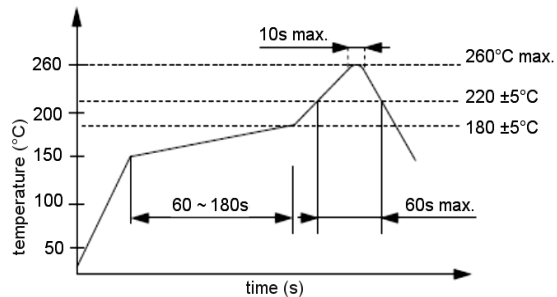

Tape specification:

