




## Quartz Crystal


SMD-version

model	KX - CT
frequency	11,05920 MHz
mode	fundamental
operating temperature	-40° ~ + 85°C
frequency tolerance at +25°C	± 50 ppm
temperature tolerance at -40° ~ + 85°C	± 100 ppm
load capacitance $C_L$	16 pF
series resonance R1 max.	50 Ohm
aging at 25°C ( first year ) max.	± 5 ppm
shunt capacitance $C_0$ max.	7,0 pF
drive level	0,1 mW
contents of reel	1000 pcs.
part no.	12.87319


Dimensions (mm):

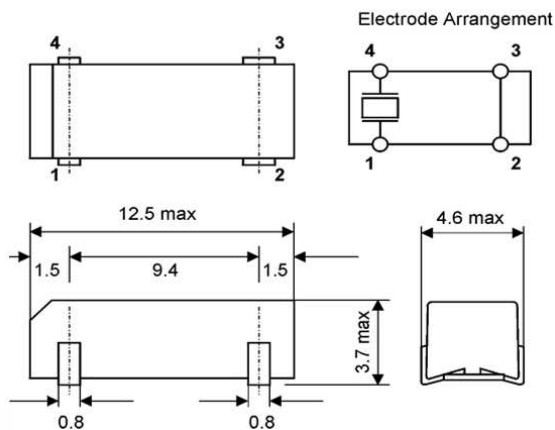

Reflow soldering condition:

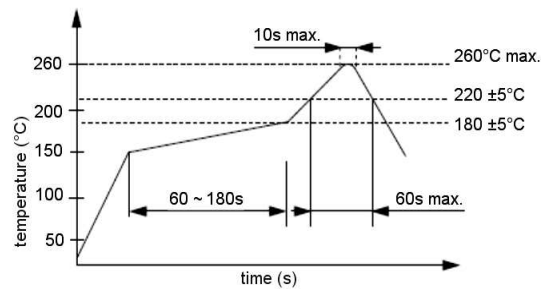

Suggested soldering pad:

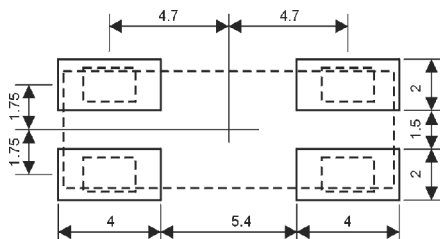

Tape specification:

