




Quartz Crystal


SMD-version

model	KX - CT
frequency	11,05920 MHz
mode	fundamental
operating temperature	-40° ~ + 85°C
frequency tolerance at +25°C	± 30 ppm
temperature tolerance at -40° ~ + 85°C	± 50 ppm
load capacitance C_L	16 pF
series resonance R1 max.	120 Ohm
aging at +25°C (first year) max.	± 5 ppm
shunt capacitance C_O max.	7,0 pF
drive level	0,1 mW
contents of reel	1000 pcs.
part no.	12.87339


Dimensions (mm):

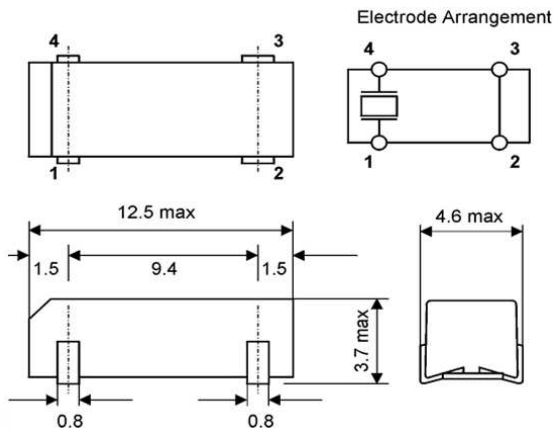

Reflow soldering condition:

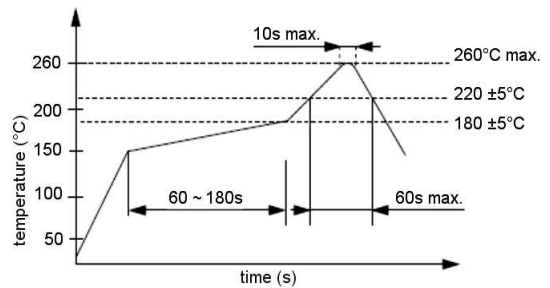

Suggested soldering pad:

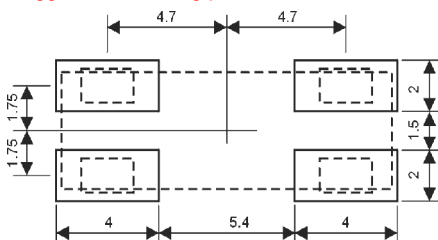

Tape specification:

