




## Clock Oscillator SMD-version


+1.8V / +2.5V / +3.3V

part no.	12.xxxxx
model	KXO-V93T
frequency range	1.0 ~ 80.0 MHz
frequency stability at -40° ~ +85°C at -20° ~ +70°C	±50 ppm ±30 ppm
operating temperature	standard -40° ~ +85°C available -20° ~ +70°C (KXO-V93)
storage temperature	-40° ~ +85°C
input voltage V <sub>DD</sub>	+1.8V DC ±5%, +2.5V DC ±5% or +3.3V DC ±5%
input current max.	2 mA at 40 MHz V <sub>DD</sub> +3V, no load
symmetry	50% ~ 50% at V <sub>DD</sub> level
rise & fall time max.	4.5 ns (10% V <sub>DD</sub> ~ 90% V <sub>DD</sub> level)
"0" level max.	VOL: 10% V <sub>DD</sub>
"1" level min.	VOH: 90% V <sub>DD</sub>
supply voltage range	1.60V ~ 3.63V
tri-state control voltage (Pin#1)	VIH: V <sub>DD</sub> x 0.7 min. VIL: V <sub>DD</sub> x 0.3 max.
output load max.	15 pF HCMOS
start up time max.	5 ms at +1.8V 2 ms at +3.3V
disable delay time max.	200 ns
enable delay time max.	5 ms
stand by current max.	10 µA (Pin #1=VIL)
random jitter	2.9 ps typ. at V <sub>DD</sub> +3.3V
total jitter	40 ps at V <sub>DD</sub> +3.3V
contents of reel	5000 pcs.


### Dimensions (mm):

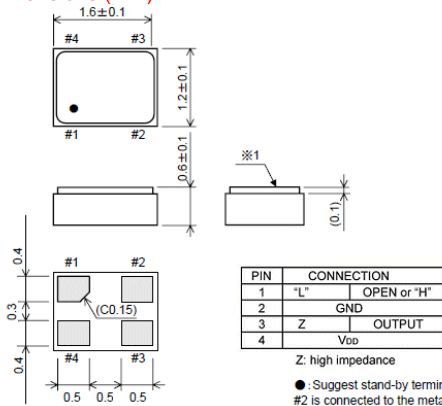


### Suggested soldering pad:




### Reflow soldering condition:

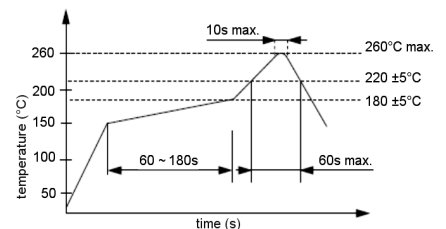

### Test circuit:

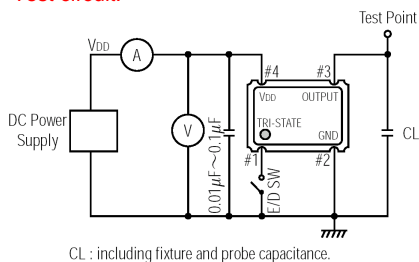

### Output waveform:

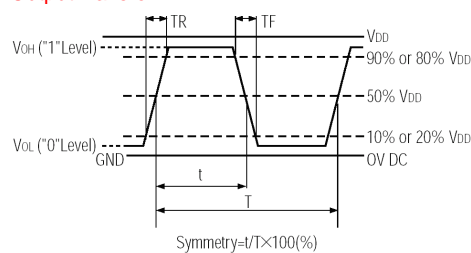

### Tape specification:

