


## Quartz Crystal


SMD-version

part no.	12.61001
model	KX – 3T
frequency	27.120 MHz
mode	fundamental
operating temperature	-40° ~ +85°C
frequency tolerance at +25°C	±10 ppm
temperature tolerance -40° ~ +85°C	±15 ppm
load capacitance $C_L$	6 pF
series resonance R1 max.	150 Ohm
aging at +25°C (first year) max.	±2 ppm
shunt capacitance $C_O$ max.	2.0 pF
drive level	10 $\mu$ W, 100 $\mu$ W max.
contents of reel	1000 pcs.


### Dimensions (mm) :

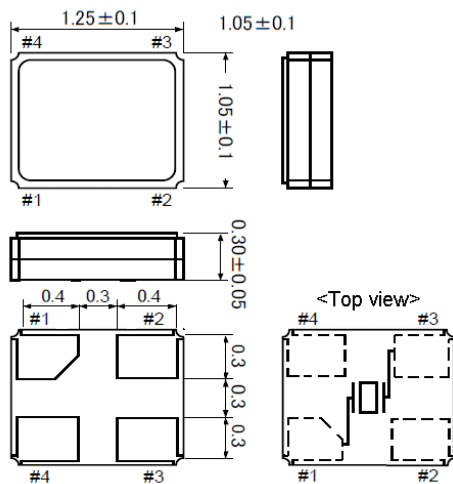


### Reflow soldering condition:

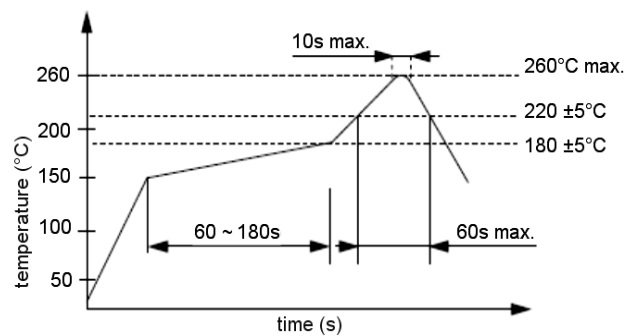

### Suggested soldering pad:



### Tape specification:

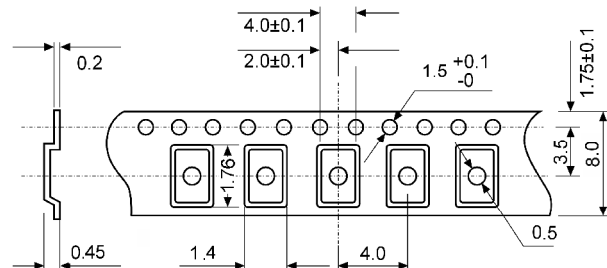

reel diameter 178 mm