




Quartz Crystal

Cylindrical type

part no.,	12.xxxxx	
model	KX-26	
frequency	32.768 kHz	77.50 kHz
holder type	2 x 6 mm	
operating temperature	standard - 20°C ~ +70°C available - 40°C ~ +85°C (KX-26T)	
frequency tolerance at +25°C	±30 ppm	±40 ppm
temperature tolerance at -20° ~ +70°C at -40° ~ +85°C	-0.042 ppm /°C² typ.	
load capacitance C _L	12.5 pF	
series resistance R1 (ESR) max.	40 kOhm	
aging at +25°C (first year) max.	±3 ppm	
shunt capacitance C ₀ max.	1.3 pF	
drive level	0.02 mW max., 0.01 mW typ	

Please note our Quartz Crystal Handling Notes

Dimensions (mm):

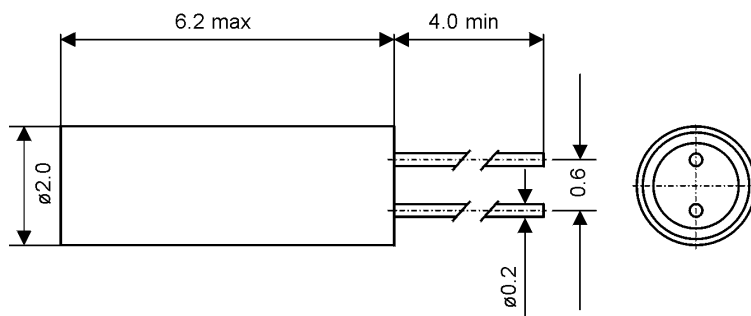

Wave soldering condition:

