



GEYER KX-7 Features and Applications:

- Low profile
- Package size: 3.2 x 2.5 x 0.8 mm, 4 pad footprint
- Frequency range: 8.0 ~ 80.0 MHz
- Moisture Sensitivity Level, MSL Level 1
- Recommended for Industrial IoT, Embedded, Automotive, Mobile SMART metering, LoRa WAN, Bluetooth-LAN, Clock for MCU, etc.
- For further specifications, please contact us





Quartz Crystal

SMD-version


part no.	12.xxxxx				
model	KX - 7				
frequency range	8.0 ~ 80.0 MHz				
mode	fundamental				
operating temperature	-20° ~ +70°C, -40° ~ +85°C (=KX-7T) available -40° ~ +105°C (=KX-7E); -40° ~ +125°C (=KX-7F)				
storage temperature	-55° ~ +125°C				
frequency tolerance at +25°C	±10 ~ ±30 ppm, or specify				
temperature tolerance at -20° ~ +70°C; -40° ~ +85°C -40° ~ +105°C, -40° ~ +125°C	±15 ~ ±50 ppm, or specify ±30 ~ ±50 ppm, or specify				
load capacitance C _L	standard 12 pF; available 7 ~ 20 pF				
series resistance R1 (ESR) max.	8.0 ~ 9.9 MHz	500 Ohm	12.0 ~ 12.9 MHz	80 Ohm	
	10.0 ~ 10.9 MHz	180 Ohm	13.0 ~ 15.9 MHz	70 Ohm	
	11.0 ~ 11.9 MHz	150 Ohm	16.0 ~ 29.9 MHz	60 Ohm	
			30.0 ~ 80.0 MHz	50 Ohm	
aging at +25°C (first year) max.	±2 ppm				
shunt capacitance C ₀ max.	3.0 pF				
drive level max.	200 µW				
contents of reel	1000 / 3000 pcs.				

Dimensions:

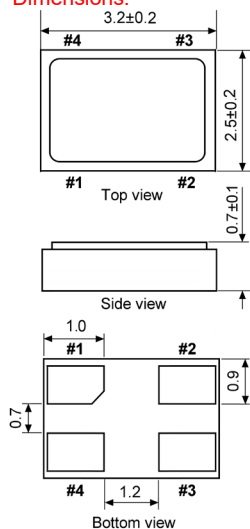


Top view connections
#2 & #4: connected to metal lid

Suggested soldering pad:



Tape specification:

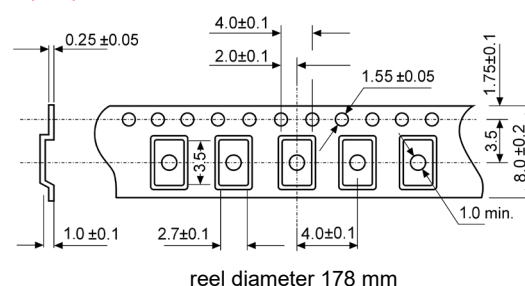

Reflow soldering condition:

