



GEYER KXO-97 Features and Applications:

- Oscillator with supply voltage 5.0 V
- Package size: 7.0 x 5.0 x 1.3 mm, 4 pad footprint
- Frequency range: 0.5 ~ 200.0 MHz
- Moisture Sensitivity Level, MSL Level 1
- Recommended for Industrial Automation, Embedded Systems, Networking, etc.
- For further requirements, please contact us



Clock Oscillator


SMD-version

+5.0 V


part no.	12.xxxxx				
model	KXO-97				
frequency range	1.0 ~ 39.999 MHz	40.0 ~ 59.999 MHz	60.0 ~ 69.999 MHz	70.0 ~ 79.999 MHz	80.0 ~ 160.0 MHz
frequency stability at -20° ~ +70°C; -40° ~ +85°C -40° ~ +105°C; -40° ~ +125°C	±25 ppm, ±50 ppm ±30 ppm; ±50 ppm; ±100 ppm				
operating temperature	standard -20° ~ +70°C available -40° ~ +85°C (=KXO-97T); -40° ~ +105°C (=KXO-97E); -40° ~ +125°C (=KXO-97F)				
storage temperature	-55° ~ +125°C				
supply voltage V _{DD}	standard + 5.0 V DC ± 10 %				
supply current max.	1.0 ~ 39.999 MHz		20 mA		
	40.0 ~ 59.999 MHz		30 mA		
	60.0 ~ 69.999 MHz		50 mA		
	70.0 ~ 79.999 MHz		50 mA		
	80.0 ~ 160.0 MHz		60 mA		
symmetry	45 % ~ 55 % at 50 % V _{DD} level				
rise & fall time max.	5 ns				
"O" level max.; "1" level min.	VOL: 10 % V _{DD} ; VOH: 90 % V _{DD}				
tri-state control voltage (Pin#1)	VIH: V _{DD} x 0.7 min.; VIL: V _{DD} x 0.3 max.				
output load	1.0 ~ 33.0 MHz		50 pF		
	33.1 ~ 75.0 MHz		30 pF		
	75.1 ~ 160.0 MHz		15 pF		
start up time max.	10 ms				
disable / enable delay time max	50 μs /4ms				
standby current max.	50 μA (Pin #1=VIL)				
Jitter max.	deterministic jitter	5 ps	norm 1-sigma	7 ps	
	random jitter	7 ps	peak to peak	40 ps	
contents of reel	1000 pcs.				



Dimensions (mm):

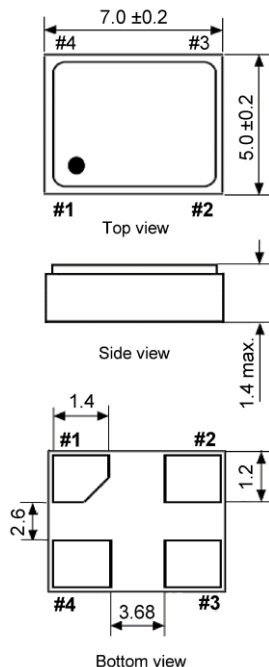


Suggested soldering pad:




PIN	Connection
1	"L" (0V) "H" or OPEN
2	GND
3	Z OUTPUT
4	V _{DD}

Z: high impedance


Test circuit:



Output waveform:

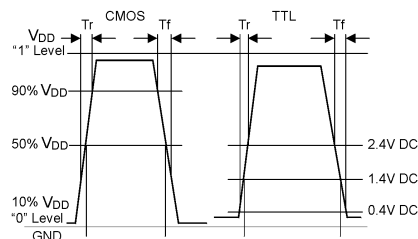

Reflow soldering condition:

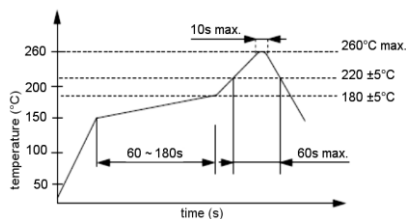

Tape specification:

