



VCXO HCMOS


SMD-version

+1.8 / +2.5 / +3.3 V


Voltage Controlled Crystal Oscillator

part no.		12.xxxxx	
model		KXO-70	
frequency range		4.0 ~ 54.0 MHz	1.0 ~ 170.0 MHz
supply voltage V _{DD}		+1.8 V DC ±5 %	+3.3 V DC ±5 %
frequency control voltage (PIN1)		0.9 V ±0.6 V	1.65 V ±1.35 V
frequency stability	over all parameters	±25, ±50, ±100 ppm over -20°C ~ +70°C / -40°C ~ +85°C (referred to +25°C)	
output	load	15 pF	
	waveform	HCMOS	
operating temperature range		-20°C ~ +70°C -40°C ~ +85°C	
storage temperature range		-55°C ~ +125°C	
supply voltage range		+1.8 ~ +3.3 V	
supply current max.		10 mA at 1.0 MHz ~ 35 mA at 170.0 MHz (no load)	
start-up time max.		5 ms	
symmetry		40 % / 60 % at ½ V _{DD} level	
rise and fall time max.		10 ns	
frequency adjustment (pullability) min.		± 50 ppm ~ ±100 ppm	
phase jitter max.		1.0 ps RMS	
phase noise max.		-80 dBc/Hz at 10 Hz -110 dBc/Hz at 100 Hz -135 dBc/Hz at 1 kHz -140 dBc/Hz at 10 kHz -145 dBc/Hz at 100 kHz	
contents of reel		3000 pcs.	


Dimensions (mm):

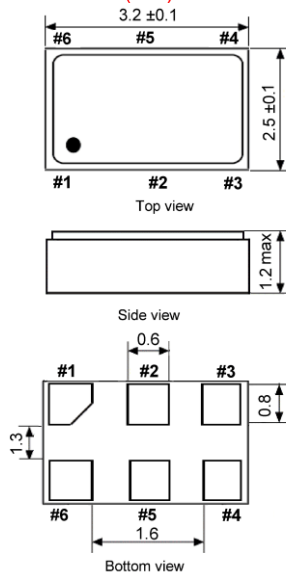

Suggested soldering pad:

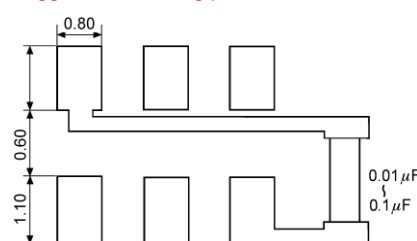


Test circuit:



Pin	Connection
1	VC
2	NC
3	GND
4	OUTPUT
5	Tri-State
6	V _{DD}

Reflow soldering condition:

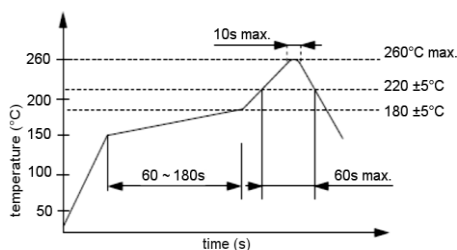

Tape specification:

